




100 × 75 × 5 × 8
(12.9kg/m)




125 × 75 × 5.5 × 9.5
(16.1kg/m)




150 × 75 × 5.5 × 9.5
(17.1kg/m)




150 × 125 × 8.5 × 14
(36.2kg/m)




180 × 100 × 6 × 10
(23.6kg/m)




200 × 100 × 7 × 10
(26.0kg/m)




200 × 150 × 9 × 16
(50.4kg/m)

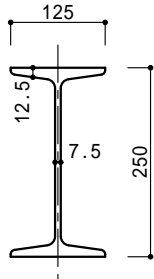


250 × 125 × 7.5 × 12.5
(38.3kg/m)

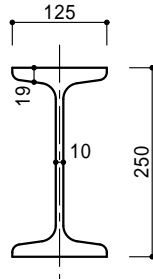


250 × 125 × 10 × 19
(55.5kg/m)

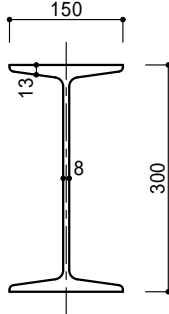


300 × 150 × 8 × 13
(48.3kg/m)

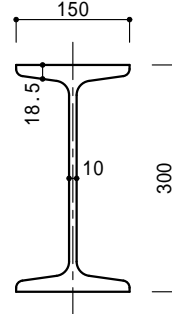


300 × 150 × 10 × 18.5
(65.5kg/m)

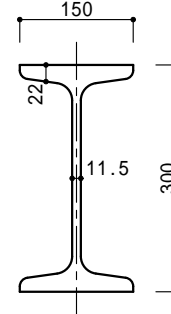


300 × 150 × 11.5 × 22
(76.8kg/m)

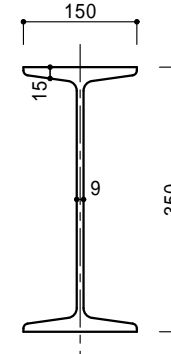


350 × 150 × 9 × 15
(58.5kg/m)

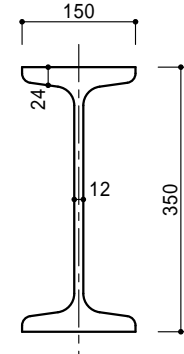


350 × 150 × 12 × 24
(87.2kg/m)

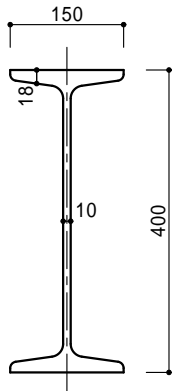


400 × 150 × 10 × 18
(72.0kg/m)

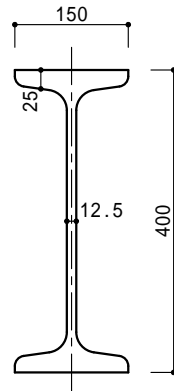


400 × 150 × 12.5 × 25
(95.8kg/m)

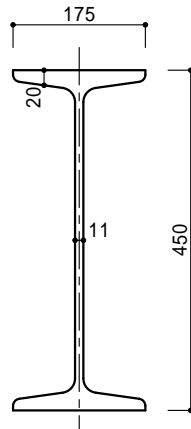


450 × 175 × 11 × 20
(91.7kg/m)

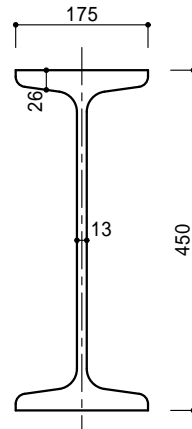

450 × 175 × 13 × 26
(115kg/m)

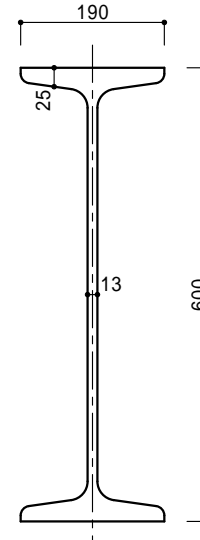

600 × 190 × 13 × 25
(133kg/m)

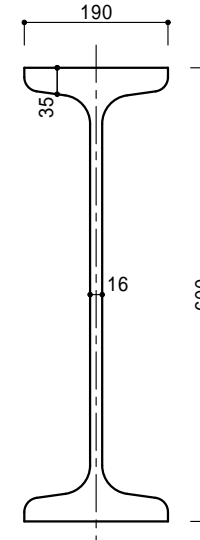

600 × 190 × 16 × 35
(176kg/m)

I 型鋼標準断面

JIS G3192 より
()は単位質量

2003/05/09
奥井淳司